




PLA-R

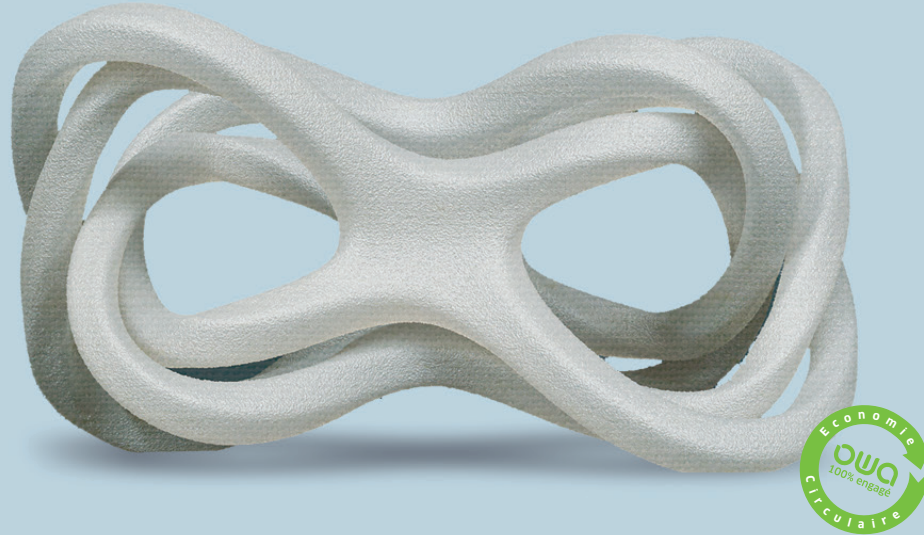

PLA-R is a recycled filament for prototypes, design printings. PLA-R Natural is biodegradable eligible.

| **EASY TO PRINT** | **SHINY APPEARANCE**
| **≥ 97 % RECYCLED MATERIAL** | **NO ODOR**

FILAMENT PROPERTIES


DESCRIPTION	TEST METHODS	UNITS	VALUES
Diameter	INS-6712	mm	1.75 ± 0.1 2.85 ± 0.1
Density	ISO 1183-1	g/cm ³	1.24
Moisture rate	INS-6711	%	< 1
Melt Flow Index (MFI) (@210°C – 2,16 kg)	ISO 1133-1	g/10min	9 - 12
Glass transition temperature Tg	ISO 11357-1 DSC (10°C/min – 20 à 220°C)	°C	61

PRINT PARAMETERS AND SPECIMENS DIMENSIONS

PRINTING DIRECTION	XY
PRINTING SPEED	50 mm/s
INFILL	100% - rectilinear
INFILL ANGLE	45°/-45°
EXTRUSION TEMPERATURE	200°C
BED TEMPERATURE	60°C


RESULTS

TENSILE TEST




Dim.(mm): 75x12.5x2
Specimen type: ISO 527-5A

BENDING TEST - CHARPY IMPACT



Dim. (mm): 80x10x4

HARDNESS



Dim.(mm): 45x45x4

PRINTED SPECIMENS PROPERTIES

	PROPERTIES	TEST METHODS	UNITS	VALUES
TENSILE	Tensile modulus	ISO 527	MPa	2,963
	Strength	ISO 527	MPa	57.9
	Strain at Strength	ISO 527	%	2.2
	Stress at break	ISO 527	MPa	47.3
	Strain at break	ISO 527	%	4.0
BENDING	Flexural modulus	ISO 178	MPa	2,675
	Flexural stress at conventionnal deflection (3,5% strain)*	ISO 178	MPa	88.8
	Flexural strength	ISO 178	MPa	91.6
	Flexural strain at flexural strength	ISO 178	%	4.3
CHARPY IMPACT	Charpy impact resistance	ISO 179	kJ/m ²	3.22
HARDNESS	Shore Hardness	ISO 868	Shore D	79.1

CERTIFICATION

% RECYCLED	≥ 97 % Recycled
% RECYCLED (FOR PLA-R NATURAL ONLY)	100 % Recycled
BIODEGRADABILITY (FOR PLA-R NATURAL ONLY)	NF EN 13432 & NF EN14995 (for a thickness of 1mm)

*According to ISO 178, end of the test at 5% deformation even if there is no specimen break

ARMOR USA, INC
2900 EARHART COURT
HEBRON KY, 41048
TEL. : 859 689 2100 – EMAIL : KIMYA@ARMOR-GROUP.COM
WWW.ARMOR-GROUP.COM/KIMYA